


KOLOSS 35 t - 3 m/min - 210 m of rope

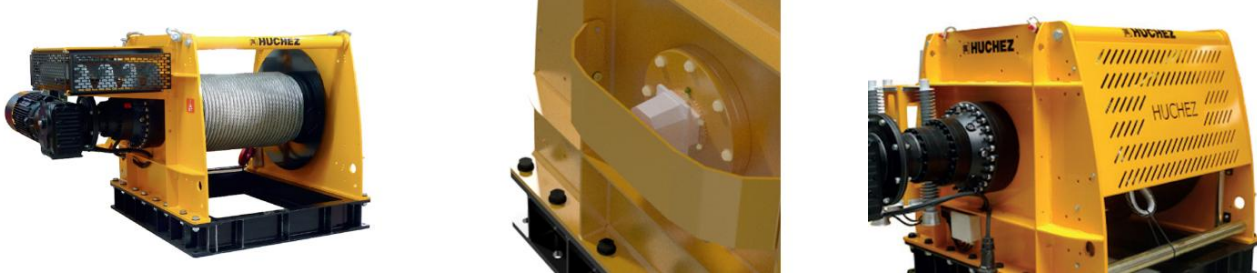

Electric winch 35000 kg. Range of electric winches with large winding capacities designed for lifting and pulling applications of very heavy loads.

Use:

- Lifting and pulling/traction operations
- Industry
- Construction and Public works
- Cofferdam lifting winch...

Made in France. Comply with 2006/42/EC Machine Directive.

Technical properties

- Robustness and reliability of HUCHEZ mechanical parts.
- Steel mechano-welded chassis shot blasted and painted.
- IP 55 Protection.
- Asynchronous motor. IP 55 protection.
- Automatic lack of current brake.
- Three phase 400 V - 50 Hz power.
- Bottom frame, control box and braking resistors mounted on the winch, electronic load limiter included.
- Low voltage control (VV) ensuring user protection against electrical risks. In addition to these advantages of very low voltage, the VV control allows variation of the winding speed, smooth starts and stops.
- Reliability of electrical and electronics components.
- 3 buttons pendant control (Up - Down - Emergency stop) not removable with potentiometer (10 m long control cable). Located in a sealed protective box fixed to the control box.
- Length of drum: 1100 mm.
- Many wire rope exits and options possible (pressure type press roller, marine paint, radio control...): consult us.

Technical characteristics of KOLOSS 35 t - 3 m/min - 210 m of rope

References	KOLOSS35VV3
Capacity 1st layer kg	50000
Capacity top layer kg	35000
Nb of layers	4
Wire rope cap. 1st layer m	40
Max. rope capacity m	210
Wire rope Ø mm	42
Adjustable speed 1st layer m/min	0,3-2,3
Adjustable speed top layer m/min	0,4-3,3
FEM	1Bm
Motor kW	22
Power	3Ph-400V
Weight kg	On request

Dimensions

References	KOLOSS35VV3
A mm	2739
B mm	1955
C mm	1665
D mm	Ø 559
E mm	1100
F1 mm	1605
F2 mm	1325
G1 mm	470
G2 mm	920
G3 mm	1320
G4 mm	1700



Technical characteristics of the other models of the range

References	KOLOSS12DVV9	KOLOSS12DVV21	KOLOSS15VV7	KOLOSS15VV17	KOLOSS17DVV6
Capacity 1st layer kg	20700	20700	20700	20700	25000
Capacity top layer kg	12000	12000	15000	15000	17000
Nb of layers	7	7	4	4	5
Wire rope cap. 1st layer m	50	50	0,6-5,5	45	50
Max. rope capacity m	520	520	0,8-7,7	240	340
Wire rope Ø mm	26	26	28	28	30
Adjustable speed 1st layer m/min		1-10,6	45	1-10,7	0,5-4,4
Adjustable speed top layer m/min		1,8-18,3	240	1,4-14,8	0,7-6,6
FEM	1Bm	1Bm	1Bm	1Bm	1Bm
Motor kW	22	37	22	37	22
Power	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V
Weight kg		Consult us	Consult us	Consult us	Consult us

References	KOLOSS17DVV14	KOLOSS20VV5	KOLOSS20VV12	KOLOSS20DVV4	KOLOSS20DVV8
Capacity 1st layer kg	25000	25000	25000	31000	31000
Capacity top layer kg	17000	20000	20000	20000	20000
Nb of layers	5	3	3	6	6
Wire rope cap. 1st layer m	50	45	45	50	50
Max. rope capacity m	340	160	160	440	440
Wire rope Ø mm	30	32	32	32	32
Adjustable speed 1st layer m/min	0,8-8,6	0,5-4,5	0,8-8,6	0,3-2,5	0,5-4,9
Adjustable speed top layer m/min	1,2-12,7	0,6-5,6	1-10,8	0,4-4	0,7-7,6
FEM	1Bm	1Bm	1Bm	1Bm	3Ph-400V
Motor kW	37	22	37	22	37
Power	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V	1Bm
Weight kg	Consult us	Consult us	Consult us	On request	On request

References	KOLOSS25VV3	KOLOSS25VV7	KOLOSS25DVV4	KOLOSS25DVV9	KOLOSS30VV3
Capacity 1st layer kg	31000	31000	41000	41000	43000
Capacity top layer kg	25000	25000	25000	25000	30000
Nb of layers	3	3	6	6	4
Wire rope cap. 1st layer m	45	45	45	45	40
Max. rope capacity m	160	160	400	400	220
Wire rope Ø mm	36	36	36	36	40
Adjustable speed 1st layer m/min	0,3-2,5	1Bm	0,3-2,5	0,5-4,8	0,3-2,5
Adjustable speed top layer m/min	0,4-3,2	0,5-4,9	0,5-4,1	0,8-8	0,4-3,6
FEM	1Bm	0,6-6,2	1Bm	1Bm	1Bm
Motor kW	22	37	22	37	22
Power	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V
Weight kg	On request	On request	On request	On request	On request

References	KOLOSS30VV8	KOLOSS30DVV3	KOLOSS30DVV8	KOLOSS35VV3	KOLOSS35VV7
Capacity 1st layer kg	43000	50000	50000	50000	50000
Capacity top layer kg	30000	30000	30000	35000	35000
Nb of layers	4	6	6	4	4
Wire rope cap. 1st layer m	40	40	40	40	40
Max. rope capacity m	220	390	390	210	210
Wire rope Ø mm	40	40	40	42	42
Adjustable speed 1st layer m/min	0,5-4,8	0,3-2,3	0,5-4,6	0,3-2,3	0,5-4,5
Adjustable speed top layer m/min	0,7-7	0,4-3,8	0,7-7,4	0,4-3,3	0,6-6,3
FEM	1Bm	1Bm	1Bm	1Bm	1Bm
Motor kW	37	22	37	22	37
Power	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V	3Ph-400V
Weight kg	On request	On request	On request	On request	On request



HUCHEZ's advice

Strong points: Winches with large winding capacities, robustness, many options possible.



HUCHEZ
4, rue Michel HAMMID
60420 FERRIERES – France
☎ +33 (0) 3 44 51 11 33
🌐 www.huchez.com
✉ contact@huchez.fr



SERVICE CLIENTS
ATENCIO AL CLIENTE
KUNDENSERVICE

Pour en savoir plus, n'hésitez pas à nous contacter!
To know more, please contact us!
Para más información, póngase en contacto con nosotros!
Für weitere Informationen können Sie sich gerne an uns wenden!