

MANIBOX VS 1000 kg, 30 m of rope - model with painted frame



Hand wormgear winch 1000 kg, model with painted frame.

Use:

- Lifting or pulling/hauling operation
- Wall-mounted or flat
- Industry
- Shows, sceneries
- Water treatment, water dams
- Sports rooms
- Hanging chandeliers...

Comply with Machines Directive 2006/42/EC. Developed and manufactured in accordance with standard NF E N 13157.

Technical properties


- Mechanical parts machined and protected by cataphoresis.
- Stainless steel ratchet spring.
- Absolute safety by worm screw and automatic brake.
- Reduction system fully protected by a metal or plastic cover providing maximum safety.
- Desengageable drum, no load only.
- Failsafe system in the rope wind direction (patented).
- Adjustable crank handle for fast winding or otherwise maximum capacity.
- Crank positioned on the right.
- Captive crank adjusting knob.
- Finition: painted frame.

Technical characteristics of MANIBOX VS 1000 kg, 30 m of rope - model with painted frame

Capacity 1st layer kg	1450
Capacity top layer kg	1000
Nb of layers	4
Wire rope cap. 1st layer m	5.5
Max. rope capacity m	30
Wire rope Ø mm	9
Weight (without wire rope) kg	37.5
Lift per crank revolution mm	8
Max. hand force on crank kg	14

Dimensions

A mm	302
B mm	470
D mm	302
E mm	322
F mm	167
G mm	-
K mm	250
L mm	340

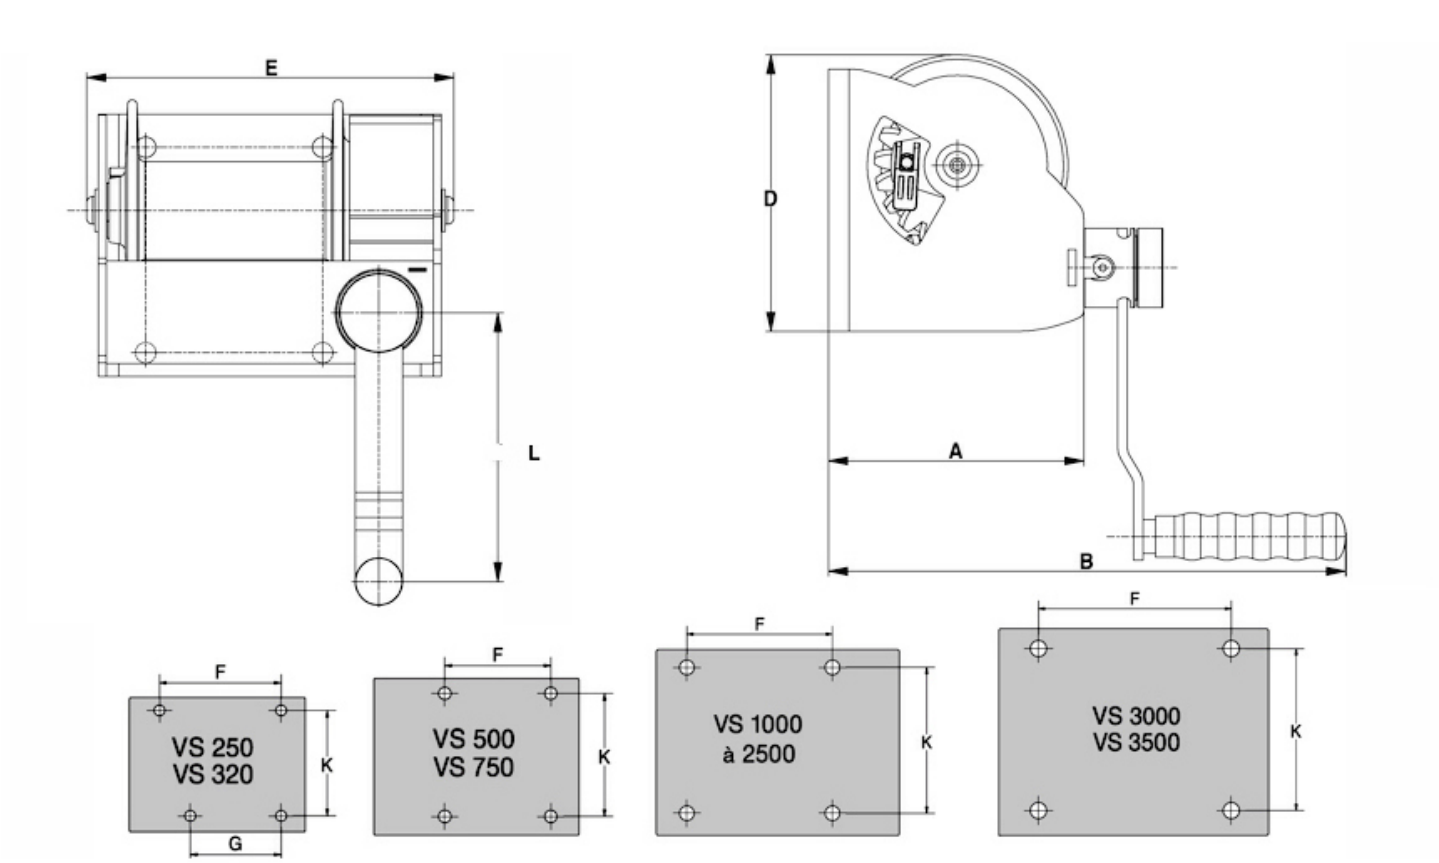

Technical characteristics of the other models of the range

References	VS250MANIBOX	VS320PREM	VS500MANIBOX	VS750PREM	VS1000MANIBOX
Capacity 1st layer kg	380	380	750	750	1450
Capacity top layer kg	250	320	500	750	1000
Nb of layers	4	2	4	1	4
Wire rope cap. 1st layer m	2.5	2.5	3	3	5.5
Max. rope capacity m	15	6	18	3	30
Wire rope Ø mm	5	6	7	7	9
Weight (without wire rope) kg	7.5	7.5	12	12	37.5
Lift per crank revolution mm	17	17	11	11	8
Max. hand force on crank kg	11	11	15	14	14

References	VS1450PREM	VS1500MANIBOX	VS2000PREM	VS2000MANIBOX	VS2500PREM
Capacity 1st layer kg	1450	2000	2000	2500	2500
Capacity top layer kg	1450	1500	2000	2000	2500
Nb of layers	1	3	1	2	1
Wire rope cap. 1st layer m	5	5.5	5.5	7	7
Max. rope capacity m	5	23	6	17	6
Wire rope Ø mm	10	11.5	12	13	13
Weight (without wire rope) kg	37.5	52	52	80	80
Lift per crank revolution mm	8	6	6	5	5
Max. hand force on crank kg	14	14	14	14.5	14.5

References	VS3000MANIBOX	VS3500PREM
Capacity 1st layer kg	3500	3500
Capacity top layer kg	3000	3500
Nb of layers	2	1
Wire rope cap. 1st layer m	7.5	7.5
Max. rope capacity m	18.5	7.5
Wire rope Ø mm	16	16
Weight (without wire rope) kg	140	140
Lift per crank revolution mm	3	3
Max. hand force on crank kg	15	15



HUCHEZ's advice

Captive crank adjusting knob, adjustable crank handle for fast winding or otherwise, maximum capacity, highly reliable rope fastener not requiring any special tools, fail safe system in the rope wind direction.



HUCHEZ
4, rue Michel HAMMID
60420 FERRIERES – France
☎ +33 (0) 3 44 51 11 33
🌐 www.huchez.com
✉ contact@huchez.fr



SERVICE CLIENTS
ATENCIO AL CLIENTE
KUNDENSERVICE

Pour en savoir plus, n'hésitez pas à nous contacter!
To know more, please contact us!
Para más información, póngase en contacto con nosotros!
Für weitere Informationen können Sie sich gerne an uns wenden!